


## ORDER INFORMATION

To contact us-  
Call: (858) 565-7405  
Email: sales@genisco.com




### Data Filters (Dual Circuit)-

GF56993-1	GF57738-1
GF56972-2	GF57686-1
GF57598-1	GF56973-2
GF58040	GF57580

**TABLE I**

Part Number	Impedance L-L (ohms)	Impedance L-G (ohms)	Voltage (Max)	Current Max (Amps)	DC Resistance (ohms)	Pass-Band (kHz)	Insertion Loss	Test Method (Per MIL-STD-220)	Baud Rate
<b>GF56993-1</b>	600	300	400 Vdc 125 Vac	0.4	≤15	0-3	≥100dB	14kHz-10GHz	1.2k
<b>GF57738-1</b>	600	300	400 Vdc 125 Vac	0.4	≤4	0-6	≥100dB	40kHz-10GHz	2.4k
<b>GF56972-2</b>	600	300	400 Vdc 125 Vac	0.4	≤2.5	0-12	≥100dB	80kHz-10GHz	4.8k
<b>GF57686-1</b>	600	300	400 Vdc 125 Vac	0.5	≤1.2	0-24	≥100dB	150kHz-10GHz	9.6k
<b>GF57598-1</b>	600	300	400 Vdc 125 Vac	0.5	≤1.0	0-48	≥100dB	300kHz-10GHz	19.2k
<b>GF56973-2</b>	600	300	400 Vdc 125 Vac	1.0	≤0.5	0-10	≥100dB	600kHz-10GHz	38.4k
<b>GF58040</b>	600	300	400 Vdc 125 Vac	1.0	≤0.5	0-140	≥100dB	1MHz-10GHz	56k
<b>GF57580</b>	124	62	400 Vdc 125 Vac	1.0	≤0.25	0-256	≥100dB	5MHz-10GHz	128k

### Mechanical Dimensions

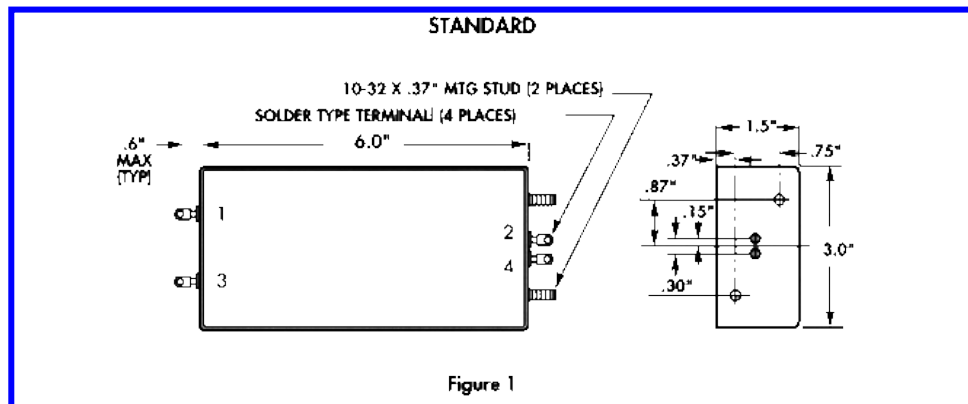

Specifications subject to change without notice